



P-822 Printer

Line Thermal printer



Specification

80mm Thermal Line Printing;
250mm/Sec high-speed printing;
Interface: Serial port、USB
(Parallel port、LAN Optional)
Auto Cutter Available;
Support Paper End Detection;


Support Kitchen printing and Network printing;
Support printing and error alarm function;
Built-in 128K bytes data buffer;
Power Supply: DC 24V/2.5A
Dimension: 145 x 210 x 140mm (WxLxH)
Weight: 1.4KG



P-822 Printer

Line Thermal printer

- Compatible with ESC/POS and Star command sets.
- Support kitchen printing and network printing.
- Support network status monitoring.
- Support OPOS driver.
- Support printer authentication and software bundle.
- High-speed driver mode printing.
- Support Parallel port, Serial port, USB, LAN.
- Built-in 128K Bytes data buffer.

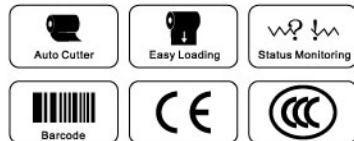

GP 80mm Series
Line Thermal Printers



Print Method	Thermal Line Printing
Print Resolution	576 dots/line or 512 dots/line
Character Size	ANK Font Font, A: 12×24 dots Font, B: 9×17 dots, Chinese Character: 24×24 dots
Barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
Interface	Parallel/Serial/USB/Ethernet
Print Width	79.5±0.5mm
Paper Roll Diameter	83mm
Paper Thickness	0.06~0.08mm
Power Supply	DC 24V / 2.5A
Auto Cutter	Full or Partial
Reliability	100KM
Working Condition	Temperature: 0~45℃ Humidity: 10~80%
Storage Condition	Temperature: -10~60% Humidity: 10~90%
Driver	Win 9X/Win ME/Win 2000/Win 2003/Win NT/Win XP/Win Vista, compatible with EPSON, SAMSUNG
Print Speed	220mm/sec
Kitchen Print	_____
Paper End Detection	_____
Wall Mount	Support
Weight	1.40KG
Dimension (W×L×H)	145×210×140mm