

Office-TBF Series

UNINTERRUPTIBLE POWER SUPPLY

WITH POWER
CONDITIONER TBF™

Multi-device Power Protection for PCs, Peripherals, Internet and Multimedia



The First UPS System with Transformer Based Filter (TBF™), an Electronic Power Conditioner. Eliminates Line Noise in Addition to Surge Protection and Battery Back-up. The Ideal Power Protection Solution for Home/Office Systems

FEATURES:

- ▶ Electronic Power Conditioner (TBF™)
- ▶ "SMART GROUND" Technology (Patent Pending). Controls Ground Noise to Protect Network Systems and Eliminates Ground Loop Current
- ▶ Automatic Save and Shutdown Software for Unattended Computers
- ▶ USB Communication Port (USB Models)
- ▶ Industry's First 4 Year Pro-Rated Battery Warranty



TEL / NETWORK PROTECTION

USB PORT
DB9 (RS232) PORT

\$25,000


CONNECTED
EQUIPMENT
PROTECTION
POLICY

SmartPower
SYSTEMS

A POWER QUALITY COMPANY™

Features

- Power Conditioning (TBF™)
- Automatic Save and Shutdown Software for unattended computer
- DB9 (RS232) communication port
- USB and DB9 (RS232) port (USB models)
- Tel / Modem / Internet / DSL (RJ11) Protection and Network Protection RJ45 (USB models only)
- User replaceable batteries
- Short circuit and overload protection
- 50/60 Hz frequency auto sensing
- Cold start (DC power on)

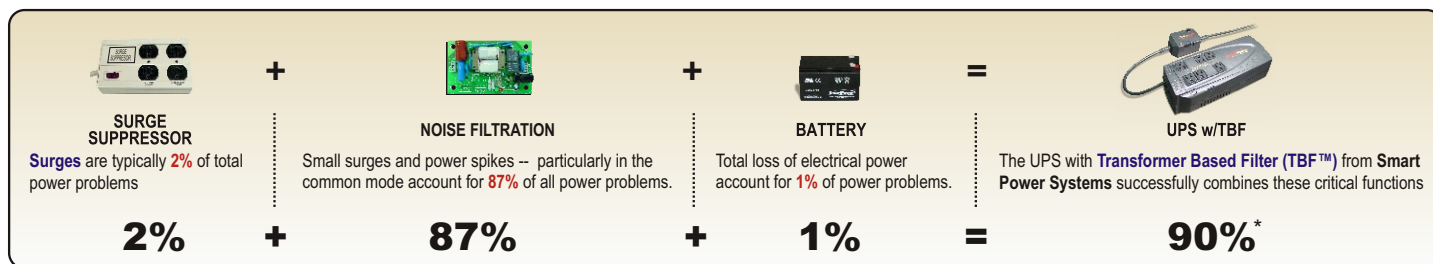

**These figures are averaged numbers based upon studies conducted by AT&T, IBM and others.*



Smart Power Systems provides a complete line of software solutions for standalone and networked computers, including SNMP support.

Supports: Win 95 / 98 / ME / XP / 2000 / 2003 / NT

UPSwing Pro™ for Novell, Linux, SCO Unix, Solaris and Windows with Networking capability is available

Specifications

MODEL	OF400-TBF	OF600-TBF	OF600USB-TBF
Output Capacity VA / W	400 / 200	600 / 300	
Output Voltage	120V		
Input Voltage	120VAC - 20% +15%		
TRANSIENT LET THROUGH VOLTAGE	<0.5V Common Mode (N-G) / <10V Normal Mode (L-N) None of the competitors publish N-G Pass Through Voltage		
Back-up Time (Minutes) Half Load.	10	7	
Net Weight (Lbs. / Kg.)	7.6 / 3.44	8.3 / 3.7	
Shipping Weight (Lbs. / Kg.)	8.92 / 4.04	9.6 / 4.3	
Dimensions D x W x H (In.)	11.7 x 5.1 x 3.3 / 297 x 130 x 83.5		
Communication Port	DB9 (RS232)	DB9 (RS232)	DB9 (RS232) and USB
Receptacles	3-NEMA 5-15R (BATTERY) + 3 NEMA 5-15R (DOUBLE FILTERED)		
Data Protection	RJ11	RJ11	RJ11/45

04-08 PN17000390

LIMITED PRODUCT WARRANTY

All Office units carry a 2 year Warranty. See our website for details.

CONNECTED EQUIPMENT PROTECTION POLICY

If the Smart Power Systems equipment fails and this failure causes the surges to pass through and damage the connected equipment, Smart Power Systems will pay for the repair or replacement of the connected equipment up to \$25,000 in accordance to Connected Equipment Protection Policy . See our website for details - www.smartpowersystems.com



1-800-882-8285

